


SmartROC T25/T30 R

Remote Control

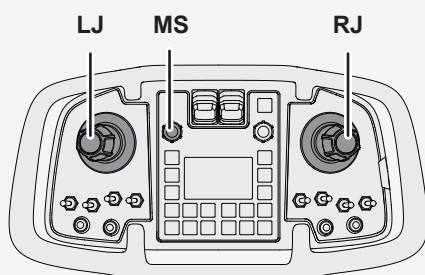

LJ (Left Joystick): Feed control
MS (Mode Selector): Select operating mode
RJ (Right Joystick): Boom control

Positioning



Read the safety precautions in the **transport instruction**.



Precondition






The **Start-up** procedure in the **Driving Instruction** is completed.



- 1 Activate positioning mode (MS).



LJ Left joystick. Feed tilt, feed swing and feed extension up and down.

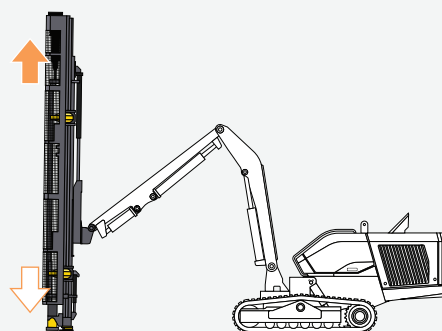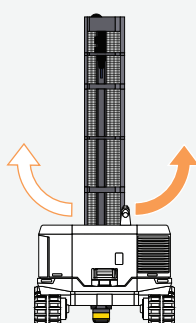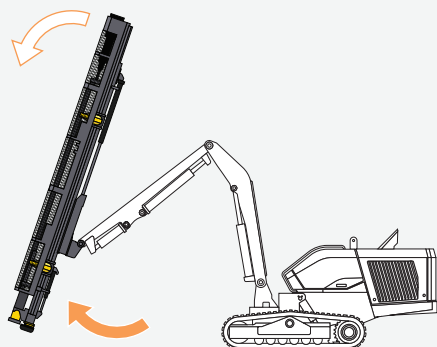

SmartROC T25/T30 R

Positioning

RJ Right joystick. Boom lift, boom swing and boom extension in and out.

