


24-Volt Battery



Do not remove this instruction from the machine during transport.

Turn off and disconnect the 24-V battery

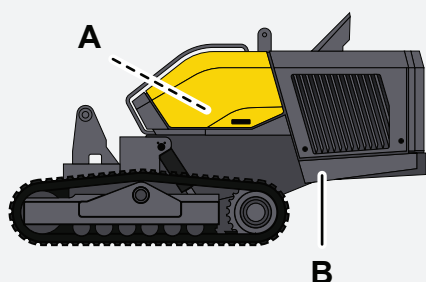


1 Park the rig and secure it appropriately.

2 Make sure that the lamp is off. Turn the battery isolation switch (B) to OFF position.



3 Push the red button (C) to set the circuit breaker (A) to OFF position.

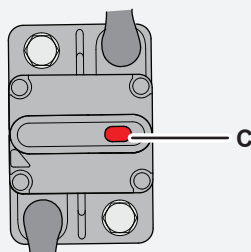

Turn the 24-V battery off during transport and parking!

If the 24-V battery isolation switch is not turned off during transport and parking, the battery will discharge.